







ZEALTOP GRANITO PVT. LTD.

Mfgs.: MULTI CHARGED & SOLUBLE SALT VITRIFIED TILES

Old Ghuntu Road, Morbi - 363 642. (Gujarat) INDIA

Phone: +91-2822-241316, 241317 Fax: +91-2822-241315

E-mail: info@zealtop.com, sales@zealtop.com

Customer Care:

Domestic Inquiry: +91 98796 08223

Export Inquiry : +91 97023 82809, 93752 43016

www.zealtop.com

DOUBLE CHARGE

VITRIFIED TILES



SOLUBLE SALT NANO

VITRIFIED TILES



FULLBODY

10mm / 16mm THICKNESS VITRIFIED TILES



AUTHENTIC NATURAL LOOK

product catalogue '2020



"WE DELIVER WHAT WE PROMISE"



Welcome to the world of Ceramic Vitrified floor tiles created by "ZEALTOP" where you find yourself amazed by our Product Range, Product Quality and Technology used to produce a Quality Product. We have a product ranges in Sizes which will give you the wide and best choice for your dream property, whether Home or Office or a Commercial projects.

Zealtop Granito Pvt Ltd. Coming from the parent company ZEALOT BALL INDUSTRY world's largest miniature S.S. Ball manufacturer for Ball Pen, enjoying the Monopoly in miniature ball manufacturing with 80% share in world market since 1983. We have experience of more than a decade in ceramic field and experience we earned from ceramic industry and parent company helps us to create not only tiles but the product that fulfills the need of each and every category of customers. Our in house R & D department and experienced personnel continuous working for providing product which is best in every aspect like Quality, Durability and Product parameters.

Our motto is to give Quality product and on time service making its mark within short time and becoming one of the largest manufacturer in single premises in India. For further assistance feel free to contact us.











13

23

03

05

TAJ WHITE

DOUBLE CHARGED VITRIFIED TILES 800x1200mm | 800x800mm

OMNI

DOUBLE CHARGED VITRIFIED TILES 800x1200mm | 800x800mm

VISTRA

DOUBLE CHARGED VITRIFIED TILES 800x1200mm | 800x800mm

07 | GEOGRESS
SERIES
POUND 5 OU MODERN METOLOGICA TO

800x800mm | 600x600mm

AMAZONE
SERIES
DOUBLE CHARGED VITRIFIED TI
800x1200mm | 800x800mm
600x600mm

MAGIC

SERIES OUBLE CHARGED

DOUBLE CHARGED VITRIFIED TILES 600x600mm | 800x800mm 800x1200mm | 1000x1000mm

TROPICANA

DOUBLE CHARGED VITRIFIED TILES 600x600mm | 800x800mm

PEARL SOLUBLE SALT NANO

DOUBLE CHARGED VITRIFIED TILES 800x800mm | 600x600mm

| SPECIAL

DOUBLE CHARGED VITRIFIED TILES 800x800mm | 600x600mm FULL BODY VITRIFIED TILES 600x600mm

HARDROCK
SERIES

FULL BODY VITRIFIED TILES
600x600mm (16mm & 10mm THICKNESS)

www.zealtop.com











PLATINUM WHITE







PLATINUM CREMA

PLATINUM CREMA

Format



600X 600MM



01









ETIOS CREMA






















ETIOS WHITE
















OMANI WHITE




OMANI BEIGE







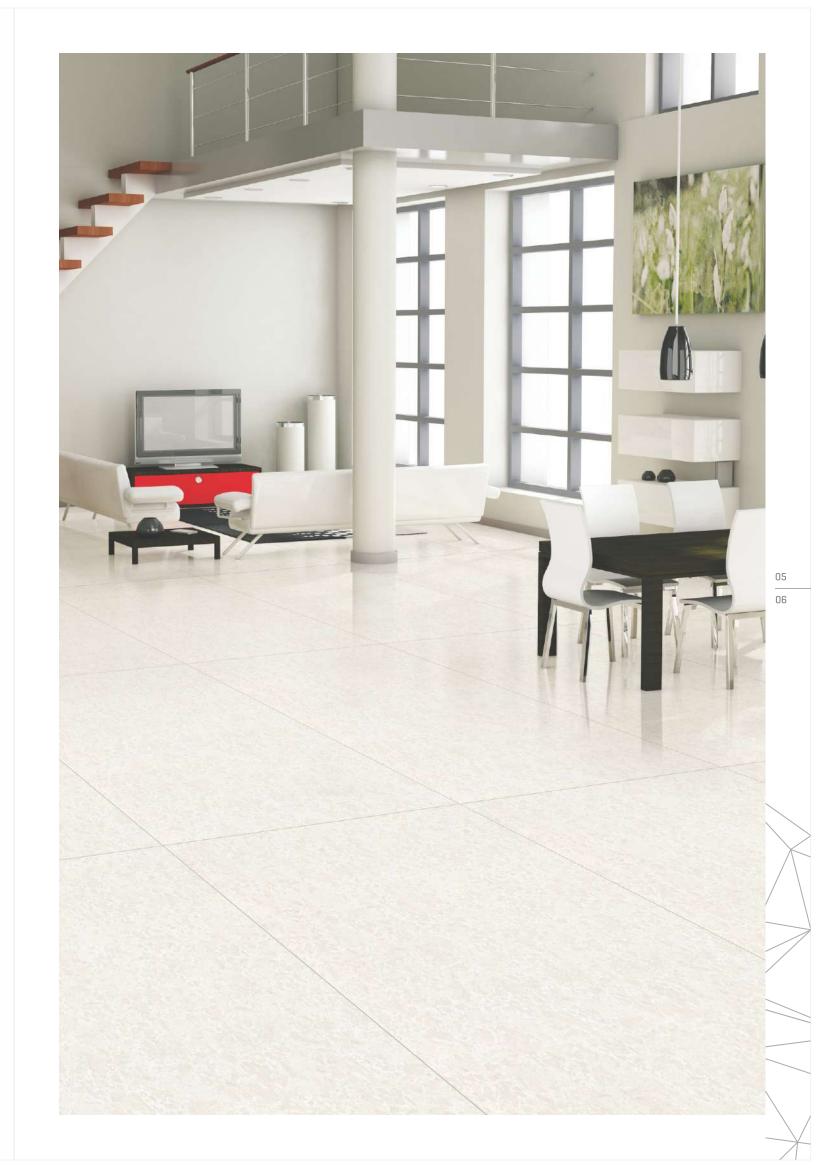
















MAGIC WHITE

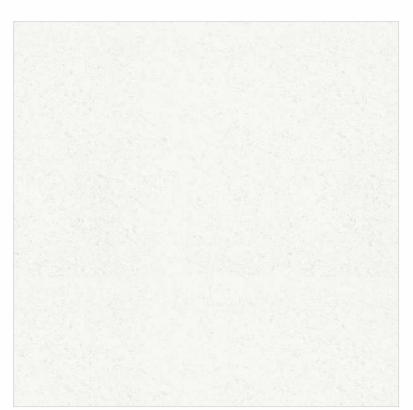

MAGIC WHITE

Format





1000X 1000MM











MAGIC WHITE MAGIC WHITE





















MAGIC BROWN

MAGIC BROWN



























MAGIC LAVA MAGIC LAVA




























MAGIC BLACK

MAGIC BLACK

















MAGIC OCEAN




MAGIC CREMA







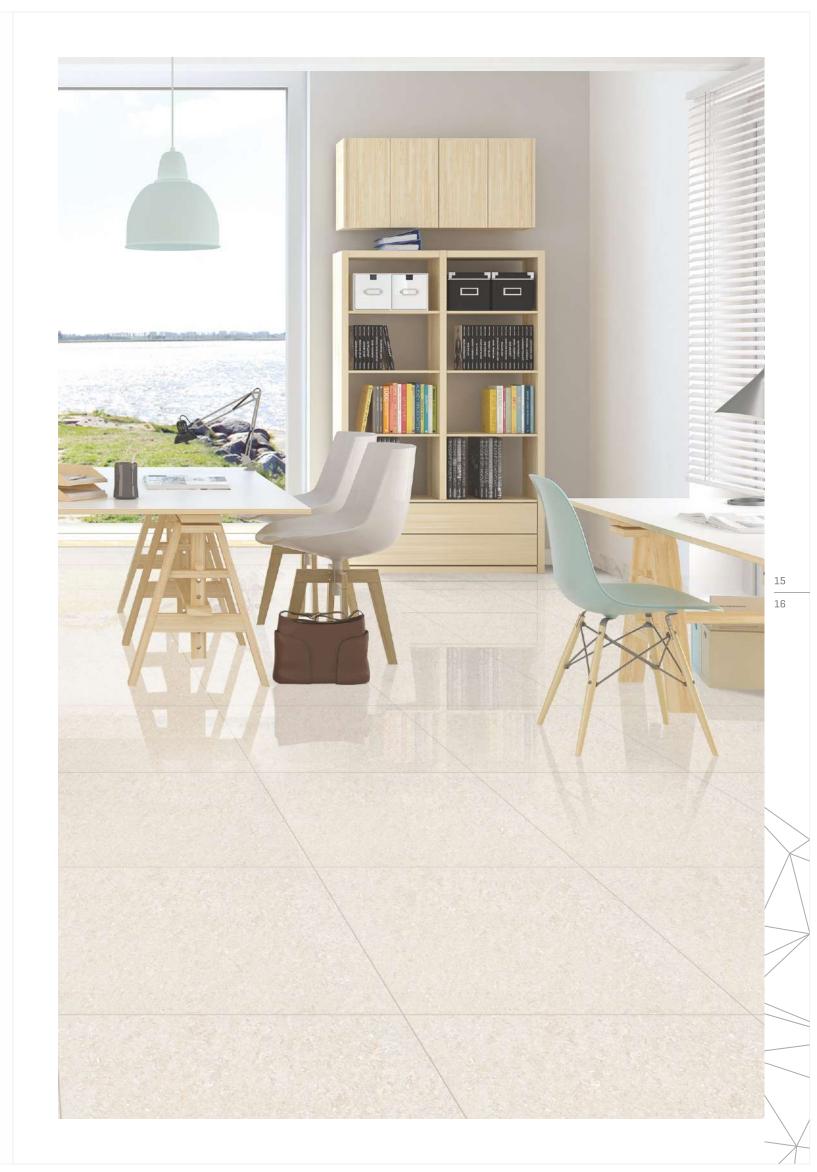







800x1200mm | 800x800mm 600x600mm



AMAZONE WHITE



AMAZONE WHITE


Format



800X 800MM

600X 600MM



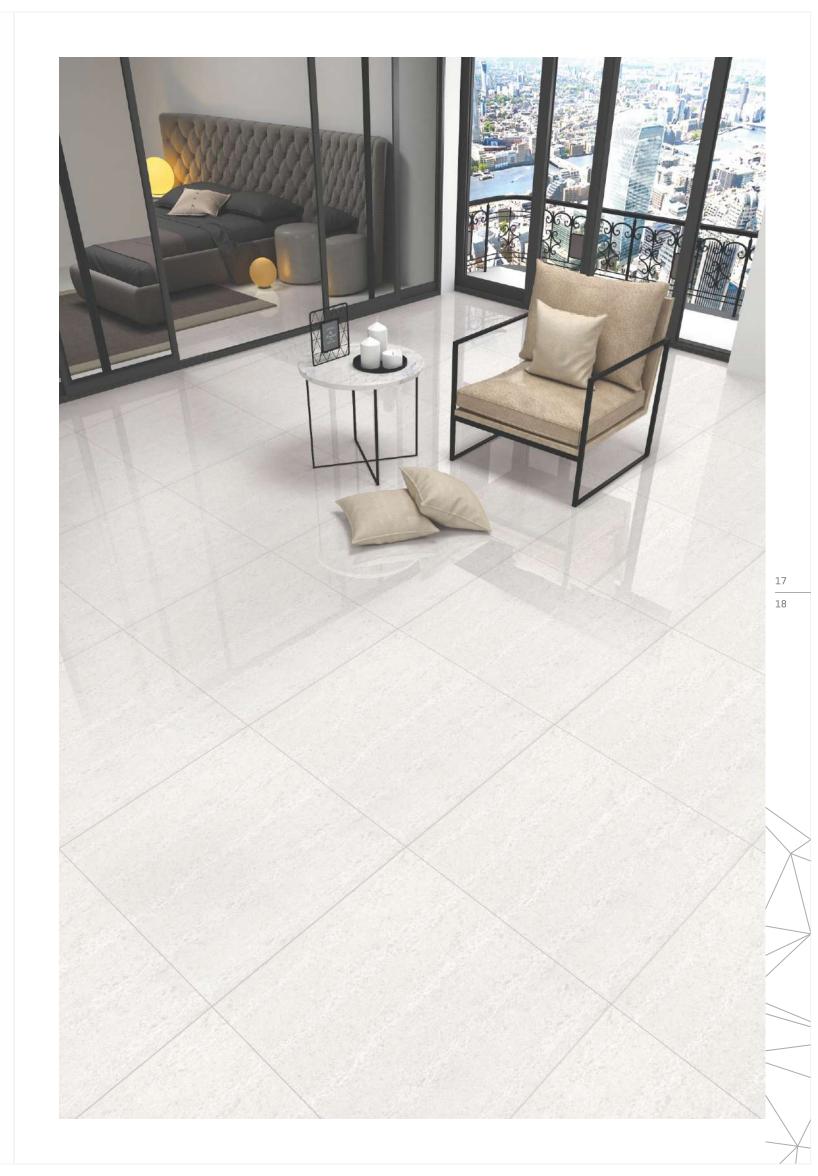







800x1200mm | 800x800mm 600x600mm



AMAZONE GOLD



AMAZONE GOLD

Format



800X 800MM

600X 600MM














VISTRA WHITE



VISTRA BEIGE

Format



800X 800MM




















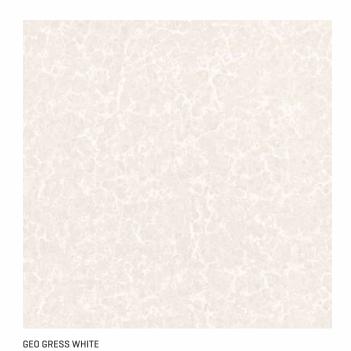











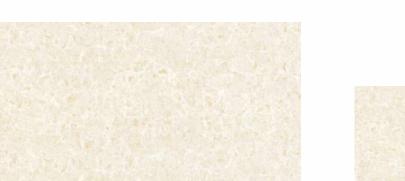





























1000x1000mm | 800x800mm 600x600mm





TROPICANA WHITE TROPICANA WHITE

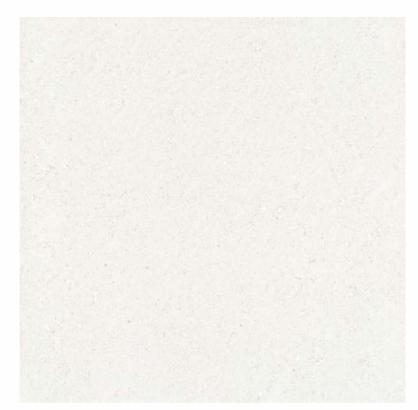

TROPICANA WHITE


Format



800X 800MM





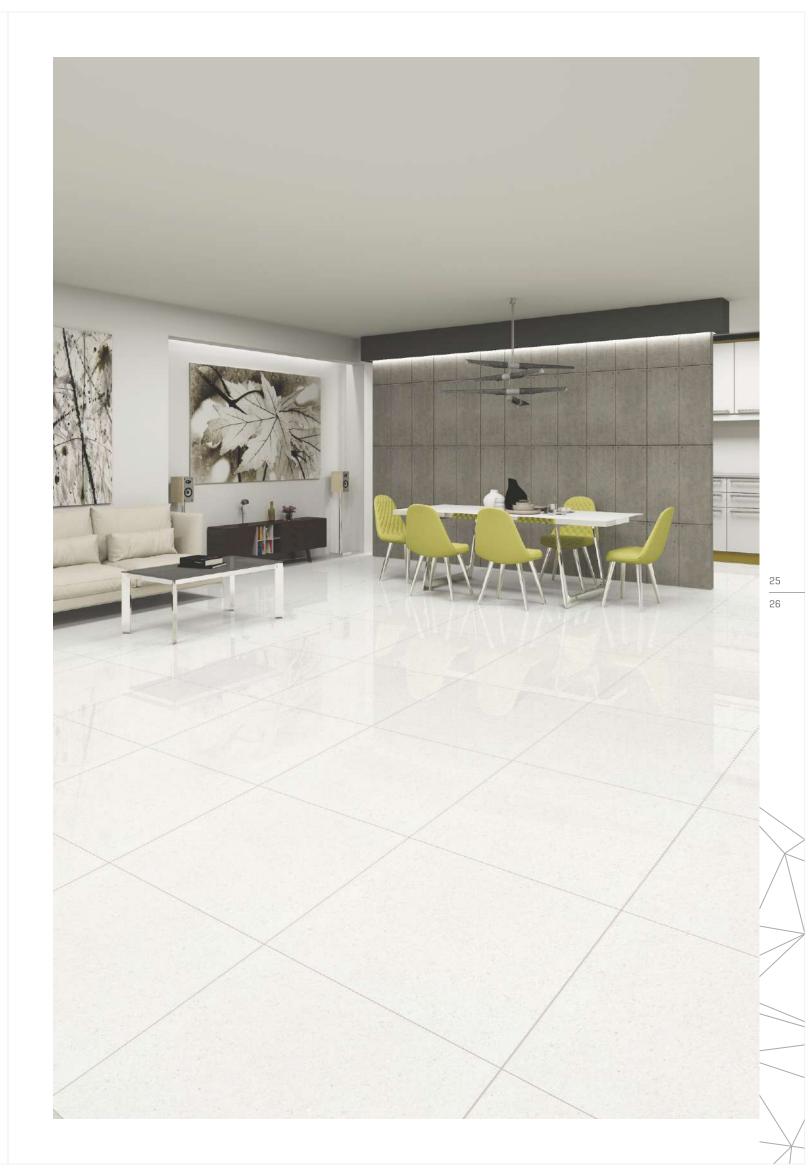









800x800mm 600x600mm





PEARL IVORY















600x600mm






















EVERA

Format

600X 600MM














LKY WHITE
KY WHITE

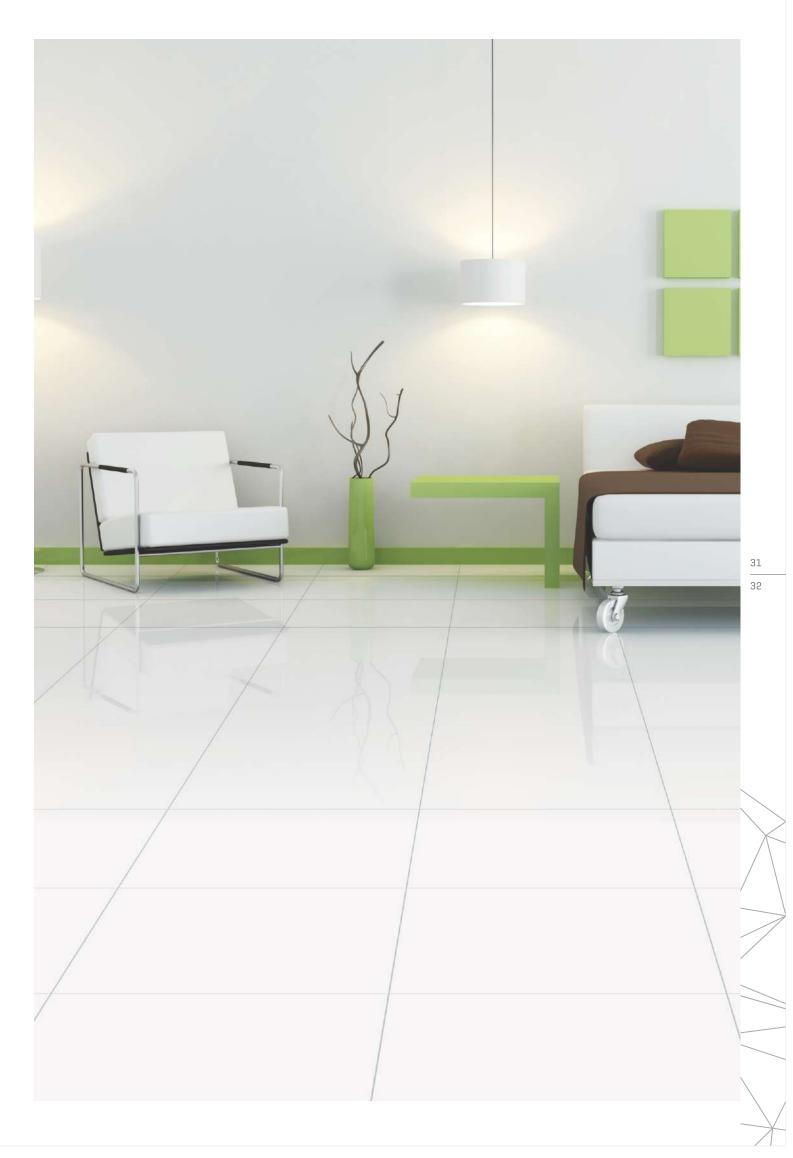






























HARD ROCK CREMA



HARD ROCK GRIS



HARD ROCK BROWN



HARD ROCK NERO



HARD ROCK CHOCO




















HARD ROCK CREMA



HARD ROCK GRIS



HARD ROCK BROWN



HARD ROCK NERO



HARD ROCK CHOCO

























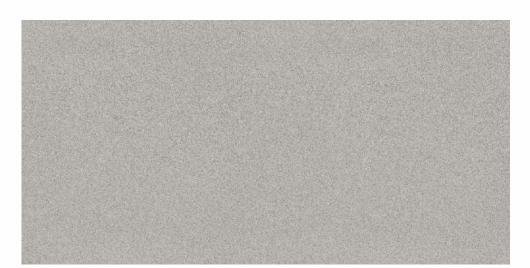


HARD ROCK GRISS

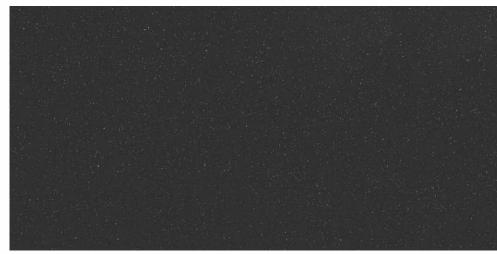

MAGIC GRAFITI



MAGIC SAND

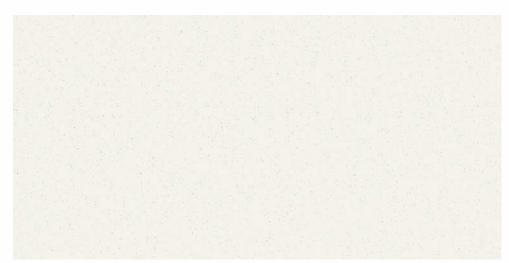

MAGIC SILVER



















FULL BODY VITRIFIED TILES 300x1200mm 200x1200mm

STEP & RISER



FULL BODY VITRIFIED TILES 300x1200mm 200x1200mm







HARD ROCK GRISS



HARD ROCK GRISS



MAGIC GRAFITI



MAGIC GRAFITI



MAGIC SAND



MAGIC SAND



MAGIC SILVER



MAGIC SILVER























TECHNICAL SPECIFICATION

SR. No.	CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	MEAN VALUE OF ZEALTOP GRANITO PVT. LTD.	TEST METHOD
A.	REGULATORY PROPERTIES			
1.	DEVIATION IN LENGTH & WIDTH	±0.5%	±0.1%	ISO-10545-2
2.	DEVIATION IN THICKNESS	±5%	±2.0%	ISO-10545-2
3.	STRAIGHTNESS OF SIDES	±0.5%	±0.1%	ISO-10545-2
4.	RECTANGULARITY	±0.5%	±0.1%	ISO-10545-2
5.	SURFACE FLATNESS	±0.5%	±0.1%	ISO-10545-2
6.	COLOR DIFFERENCES	UNALTERED	NO CHANGE	ISO-10545-10
7.	GLOSSINESS	AS PER MANUFACTURER	MIN.70 %	GLOSSOMETER
В.	STRUCTURAL PROPERTIES			
8.	WATER ABSORPTION	≤0.5%	<0.03%	ISO-10545-3
9.	APPARENT DENSITY	>2.0gm/cc	>2.28 gm/cc	DIN 51032
0.				BIITOTOOL
C.	MASSIVE MECHANICAL PROPERTIES			
10.	FLAXURAL MODULUS OF RUPTURE	MINE 35N/mm ²	MIN 40N/mm ²	ISO-10545-4
11.	FLEXURAL BRAKING STRENGTH	MIN 1300 N	MIN 1750 N	ISO-10545-4
12.	IMPACT RESISTANCE	AS PER MANUFACTURER	MIN 0.55	ISO-10545-5
D.	SURFACE MECHANICAL PROPERTIES			
13.	DEEP ABRASION RESISTANCE	MAX 175mm³	MAX 132mm³	ISO-10545-6
14.	MOH'S HARDNESS	MIN 5 to 6	6*	EN101
E.	THERMO HYGROMETRIC PROPERTIES	NO 5 111 05	50005 0005	
15.	FROST RESISTANCE	NO DAMAGE	FROST PROOF	ISO-10545-12
16.	THERMAL SHOK RESISTANCE	NO DAMAGE	NO DAMAGE	ISO-10545-9
17.	MOISTURE EXPANSION	NIL	NIL	ISO-10545-10
18.	THARMAL EXPANSION	MAX 9.0x10 ⁻ 6	MAX 6.5X10 ⁻ 6	ISO-10545-8
F.	CHAMICAL PROPERTIES			
19.	CHEMICAL RESISTANCE	NO DAMAGE	NO DAMAGE	ISO-10545-13
20.	STAIN RESISTANCE	RESISTANT	RESISTANT	ISO-10545-14
	OAFETY DROBE DITIES			
G.	SAFETY PROPERTIES	> 0.40	>0.40	100 40545 47
21.	SLIP RESISTANCE (FRICTION CO EFFICIENT)	> 0.40	>0.40	ISO-10545-17

PACKING DETAILS SOLUBLE SALT & DOUBLE CHARGE

SR. NO.	NOMINAL SIZE BOX	NO.OF TILES PER BOX	COVERAGE AREA (PER BOX)		
1	600 X 600mm	4	1.44 Sq. Mtr.	15.50 Sq. Ft.	
2	800 X 800mm	3	1.92 Sq. Mtr.	20.66 Sq. Ft.	
3	800 X 1200mm	2	1.92 Sq. Mtr.	20.66 Sq. Ft.	
4	1000 X 1000mm	2	2.00 Sq. Mtr.	21.53 Sq. Ft.	

Immediate cleaning action is the best way.

N.B.: CHEMICALS REFERENCE ARE FOR FIRST AID SUGGESTION. FOR ANY DETAIL PLEASE CONTACT COMPANY PERSONNEL.

Format





www.zealtop.com

TECHNICAL SPECIFICATION

SR. No.	CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	MEAN VALUE OF ZEALTOP VITRIFIED TILES	TEST METHOD
A.	REGULATORY PROPERTIES			
-	DEVIATION IN LENGTH & WIDTH	±0.5%	±0.1%	ISO-10545-2
	DEVIATION IN THICKNESS	±5.0%	±2.0%	ISO-10545-2
	STRAIGHTNESS OF SIDES	±0.5%	±0.1%	ISO-10545-2
	RECTANGULARITY	±0.5%	±0.1%	ISO-10545-2
	SURFACE FLATNESS	±0.5%	±0.1%	ISO-10545-2
	COLOR DIFFERENCES	UNALTERED	NO CHANGE	ISO-10545-10
	GLOSSINESS	AS PER MANUFACTURER	MIN.70 %	GLOSSOMETER
В.	STRUCTURAL PROPERTIES			
*	WATER ABSORPTION	≤0.5%	<0.05%	ISO-10545-3
	APPARENT DENSITY	>2.0gm/cc	>2.28 gm/cc	DIN 51082
C.	MASSIVE MECHANICAL PROPERTIES			
○.	FLAXURAL MODULUS OF RUPTURE	MINE 35N/mm ²	MIN 40N/mm ²	ISO-10545-4
	FLEXURAL BRAKING STRENGTH	MIN 1300 N	MIN 2000 N	ISO-10545-4
	IMPACT RESISTANCE	AS PER MANUFACTURER	MIN 0.55	ISO-10545-5
	IVII AOT REGIOTANOE	NOT EIT WATOT NOTOTIET	WII 4 0.00	100 100+0 0
D.	SURFACE MECHANICAL PROPERTIES			
	DEEP ABRASION RESISTANCE	MAX 175mm³	MAX 132mm³	ISO-10545-6
	MOH'S HARDNESS	MIN 6	8*	EN101
E.	THERMO HYGROMETRIC PROPERTIES			
•	FROST RESISTANCE	NO DAMAGE	FROST PROOF	ISO-10545-12
	THERMAL SHOK RESISTANCE	NO DAMAGE	NO DAMAGE	ISO-10545-9
	MOISTURE EXPANSION	NIL	NIL	ISO-10545-10
	THARMAL EXPANSION	MAX 9.0x10 ⁻ 6	MAX 6.5X10 ⁻ 6	ISO-10545-8
F.	CHAMICAL PROPERTIES			
	CHEMICAL RESISTANCE	NO DAMAGE	NO DAMAGE	ISO-10545-13
*	STAIN RESISTANCE	RESISTANT	RESISTANT	ISO-10545-14
G.	SAFETY PROPERTIES	. 0.40	. 0. 40	
	SLIP RESISTANCE (FRICTION CO EFFICIENT)	> 0.40	>0.40	ISO-10545-17

* FOR UNPOLISHED VITRIFIED TILE

PACKING DETAILS

SR.NO.	NOMINAL SIZE BOX	THICKNESS	NO.OF TILES PER BOX	COVERAGE AREA (PER BOX)	
1	600mm X 600mm	16mm	2 PCS.	0.72 SQ.MTR	7.75 SQ.FT.
2	600mm X 600mm	10mm	4 PCS.	1.44 SQ.MTR	15.5 SQ.FT.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing we advise you to follow the fixing instruction on the cartoons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.







